


# Inductive Proximity Sensors

M30 | 10mm | NC | 200mA | 2 Wire

Ordering Code: A20C-3010-B-2

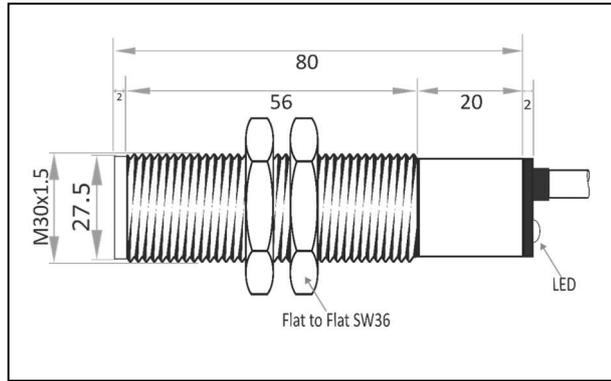


ACCENT CONTROLS

## Technical Specifications

Cylindrical Metal Housing Diameter/Pitch (mm)	M30 / 1.5
Installation	Flush
Rated Operating Distance (Sn)	10 mm
Actual Sensing Distance (Sa)	8.1 mm
Minimum Target size (min)	30 x 30 x 1 mm
Repeat Accuracy	≤ 10% mm
Hysteresis	≤ 15% of Sn
Operating Voltage	40 - 250V AC
Supply Frequency	50 Hz
Output Circuit Type	Normally Closed
Max. Load Current (On state)	≤ 200 mA
Current Consumption (No Load)	< 10 mA
Residual Current	< 3.5 mA
Switching Frequency	25 Hz
O/P status Indicator	Red LED
Voltage Drop	≤ 12V
Correction factor - Brass / Al	0.5 / 0.4
Operating Temperature Range	-10°C to 70°C
Temperature Drift	≤ 10% of Sn
Environmental Protection	IP67
Housing Material	Nickel Plated Brass

## Electrical Connections

Termination	2 meter Prewired 2-Core PVC Cable (2 x 0.44mm <sup>2</sup> )
-------------	--

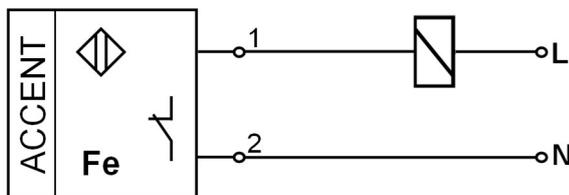

### Wire Colour Coding:

1. RED : Live
2. BLACK : Neutral